


# Cascade

Geotechnical Inc.

## Type 2 DOT Industrial Curtain

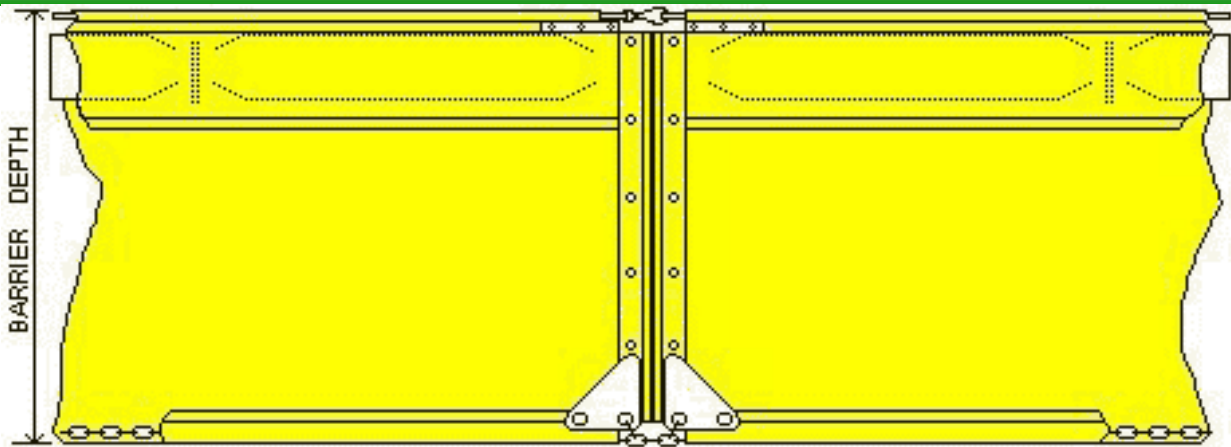

Type 2 Industrial Turbidity Curtains are manufactured to increase the overall strength of the curtain allowing for its deployment in waters with higher flow rates. The BMP Supplies Type 2 Industrial Turbidity Curtain is manufactured with top load cables, stress plates for reinforcing the corners, and 24" ASTM Universal connector plates used to connect one section to another. The floats are covered with 18oz PVC Fabric and the skirt is manufactured using a woven fabric which allows for water to flow through the skirt while still filtering all soil and sediment. The Type 2 Industrial Curtain is designed to handle more severe conditions such as lakes, streams, inter coastal and tidal areas where current velocities up to five feet per second are expected.

Float Fabric:	18 or 22 Oz PVC Coated Nylon. (Yellow)
Body Fabric:	315 Woven Fabric (Black)
Top Cable Connection:	24" Aluminum universal connector with pin
End Treatment:	Yellow PP rope sewn in vertical ends of sections
Connections:	Universal connectors interlock and fixed with toggle pin (supplied) Chain connected with carabineers (supplied) Holes punched and black cable ties inserted manually at rope vertical ends (supplied)
Section Size:	50 feet length X 2.5-10 feet depth (custom sizes available)
Floation:	6" X 6" X 88" Expanded polystyrene (EPS) per 96". 6 sections per 50' of curtain. Buoyancy 1010 kg/m3
Weight Chain:	5/16" Zinc Coated anchor chain
Weight Chain Connection:	5/16" Chain connector (supplied)
Top Cable:	3/16" Galvanized Wire Rope
Optional:	5"x10' Oil Boom that connects to the top cable via carabineers

Phone: 780-454-2400 Fax: 780-451-0911 Toll Free: 1-800-565-6130

E-mail: [mailbox@cascade.ca](mailto:mailbox@cascade.ca)

15620-121a Ave. NW, Edmonton, Alberta \* Canada \* T5V-1B5